




## 2-way Pilot operated solenoid valve

Fig.48C




[www.coreline.dk](http://www.coreline.dk)




# Fig.48C 2-way NC solenoid valve

## Part list - 2-way NC solenoid valve

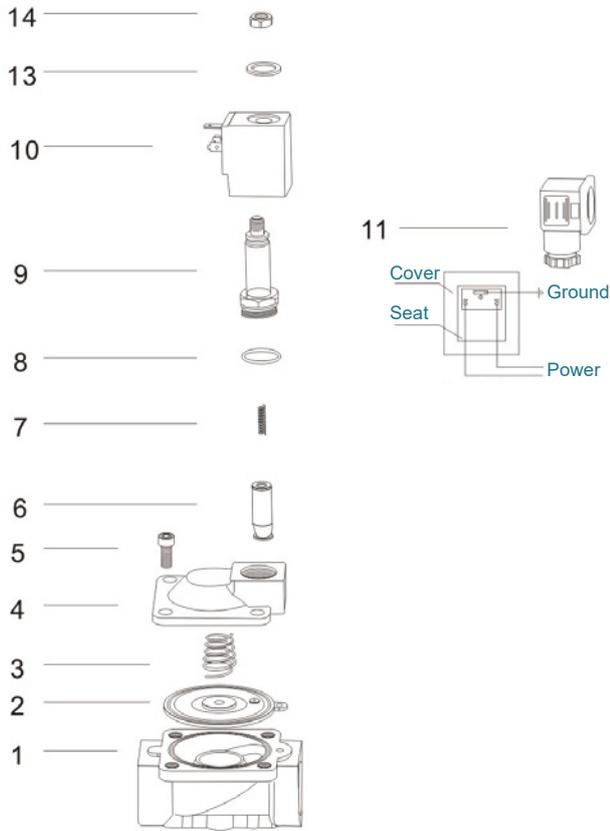

Item No.	Part
1	Valve body
2	Diaphragm
3	Diaphragm spring
4	Valve cover
5	Bolts
6	Plunger assembly
7	Plunger spring
8	O-ring
9	Plunger tube assembly
10	Coil
11	Plug
12	Gasket
13	Locknut


## Flow chart

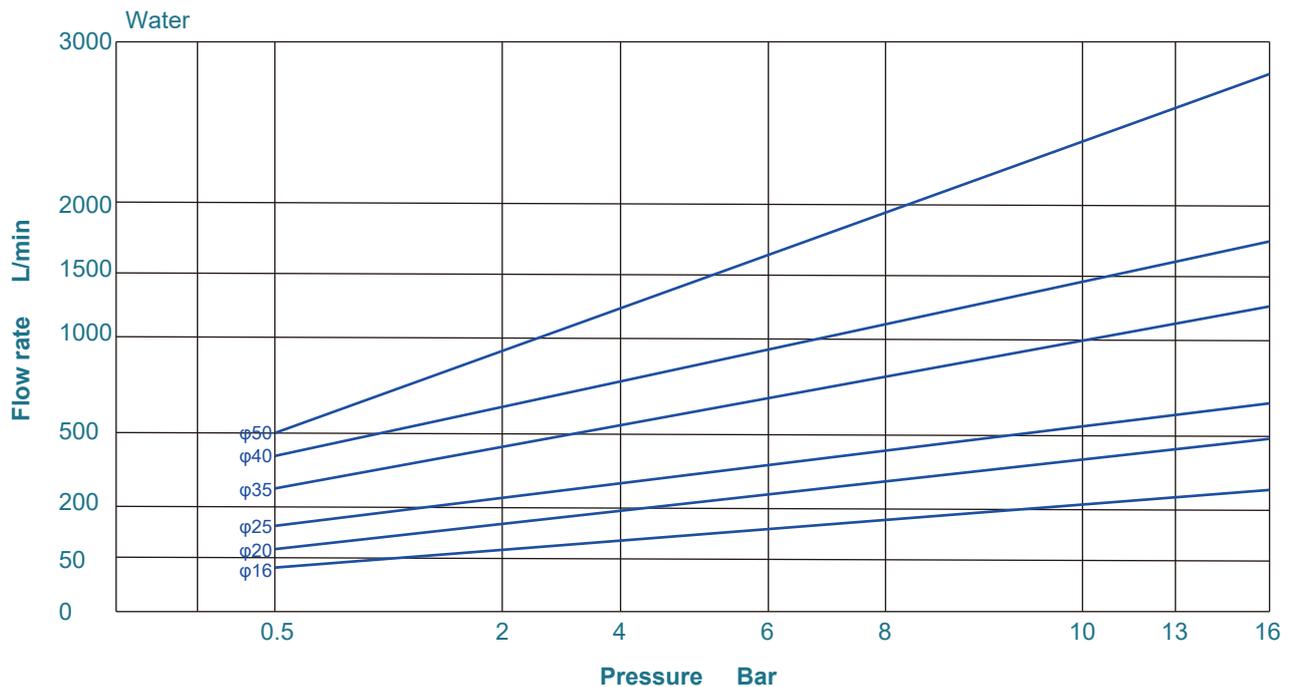

# Fig.48C 2-way NC solenoid valve

## Specifications - 2-way NC solenoid valve

- 2-way normally closed solenoid valve: closed when de-energized, open when energized.
- Body material in stainless steel 316.
- Max. Allowable pressure 16bar; ambient temperature 0~65°C.
- Serialized products, small in size, large flow rate, widely use.
- Flow as the arrow, mounts in any position; Best position is solenoid vertical and upright direction.
- Voltage: 220VAC / 230VAC / 240VAC / 110VAC / 24VAC 50 / 60HZ 24VDC / 12VDC;  
Voltage tolerance: +10% to -10% applicable voltage.
- This series valves are offered NBR, VITON, EPDM etc. for seals and diaphragm to provide on-off control of various medium.

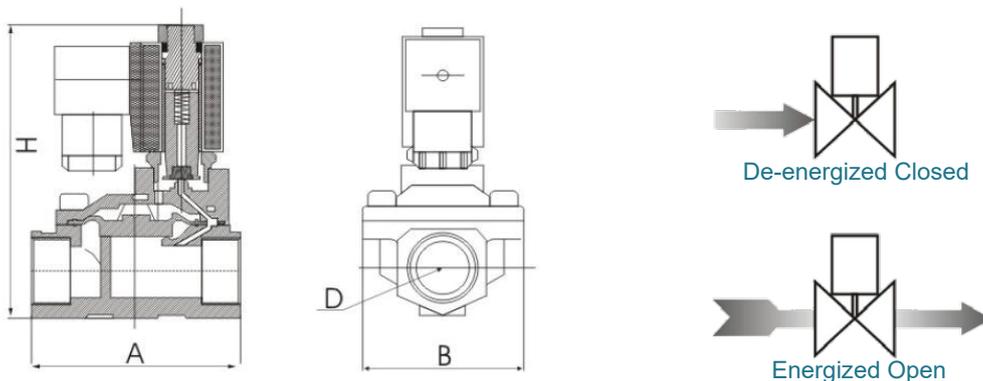



## Dimensions - 2-way NC solenoid valve

SIZE	Orifice [mm]	Cv	Operating differential pressure [bar]				Max. medium Temp.	Coil type	Power consumption		Coil class	External Dimensions AxBxH	Weight [kg]
			Min.		Max.				VA 220VAC	W 24VDC			
			Medium	Air Gas	Water Hot water Liquids	Light oil ≤20CS1							
3/8"	13	4.5	0.5	16	16	13	80	D	22	13	F	66X48X107	0.75
	13	4.5	0.5	16	16		130	D	22	13	F	66X48X107	0.75
	13	4.5	0.5	16	16	13	120	D	22	13	F	66X48X107	0.75
1/2"	13	4.5	0.5	16	16	13	80	D	22	13	F	66X48X107	0.7
	13	4.5	0.5	16	16		130	D	22	13	F	66X48X107	0.7
	13	4.5	0.5	16	16	13	120	D	22	13	F	66X48X107	0.7
3/4"	20	7.6	0.5	16	16	13	80	D	22	13	F	75X58X112	0.9
	20	7.6	0.5	16	16		130	D	22	13	F	75X58X112	0.9
	20	7.6	0.5	16	16	13	120	D	22	13	F	75X58X112	0.9
1"	25	12	0.5	16	16	13	80	D	22	13	F	96X70X131	1.3
	25	12	0.5	16	16		130	D	22	13	F	96X70X131	1.3
	25	12	0.5	16	16	13	120	D	22	13	F	96X70X131	1.3
1 1/4"	35	22	0.5	16	16	13	80	D	22	13	F	131X96X146	2.6
	35	22	0.5	16	16		130	D	22	13	F	131X96X146	2.6
	35	22	0.5	16	16	13	120	D	22	13	F	131X96X146	2.6
1 1/2"	40	30	0.5	16	16	13	80	D	22	13	F	131X96X146	2.5
	40	30	0.5	16	16		130	D	22	13	F	131X96X146	2.5
	40	30	0.5	16	16	13	120	D	22	13	F	131X96X146	2.5
2"	50	48	0.5	16	16	13	80	D	22	13	F	165X120X167	4.4
	50	48	0.5	16	16		130	D	22	13	F	165X120X167	4.4
	50	48	0.5	16	16	13	120	D	22	13	F	165X120X167	4.4

# Fig.48C 2-way NO solenoid valve

## Specifications - 2-way NO solenoid valve

- 2-way normally open solenoid valve: open when de-energized, closed when energized.
- Body material in stainless steel 316.
- Max. allowable pressure 16bar; ambient temperature 0~65 °C .
- Serialized products, small in size, large flow rate, widely use.
- Flow as the arrow, mounts in any position; Best position is Solenoid vertical and upright direction.
- Voltage: 220VAC/230VAC/240VAC/110VAC/24VAC 50/60HZ 24VDC/12VDC;  
Voltage Tolerance: +10 % to -10% applicable voltage.
- This series valves are offered NBR, VITON, EPDM etc. for seals and diaphragm to provide on-off control of various medium.

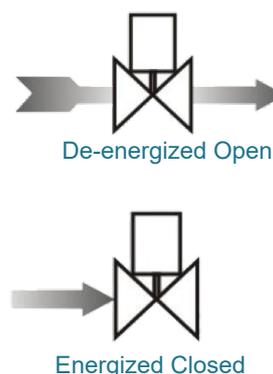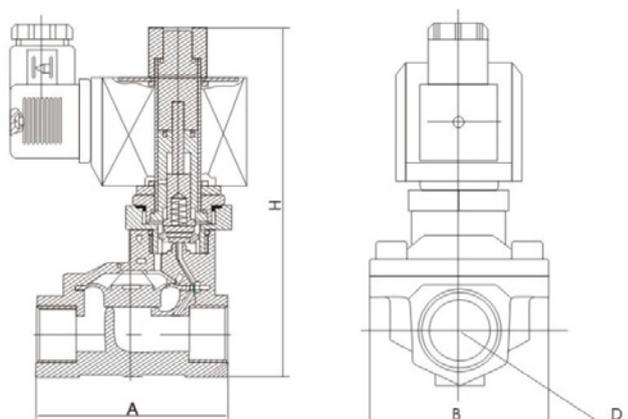

## Dimensions - 2-way NO solenoid valve

SIZE	Orifice [mm]	Cv	Operating differential pressure [bar]				Max. medium Temp.	Coil type	Power consumption		Coil class	External Dimensions AxBxH	Weight [kg]
			Min. Medium	Max.					VA 220VAC	W 24VDC			
				Air Gas	Water Hot water Liquids	Light oil ≤20CS1							
3/8"	13	4.5	0.5	13	13	8	80	D	20	20	F	66X48X124	0.95
	13	4.5	0.5	13	13		120	D	20	20	F	66X48X124	0.95
	13	4.5	0.5	13	13	8	120	D	20	20	F	66X48X124	0.95
1/2"	13	4.5	0.5	13	13	8	80	D	20	20	F	66X48X124	0.9
	13	4.5	0.5	13	13		120	D	20	20	F	66X48X124	0.9
	13	4.5	0.5	13	13	8	120	D	20	20	F	66X48X124	0.9
3/4"	20	7.6	0.5	13	13	8	80	D	20	20	F	75X58X130	1.1
	20	7.6	0.5	13	13		120	D	20	20	F	75X58X130	1.1
	20	7.6	0.5	13	13	8	120	D	20	20	F	75X58X130	1.1
1"	25	12	0.5	13	13	8	80	D	20	20	F	96X70X143	1.5
	25	12	0.5	13	13		120	D	20	20	F	96X70X143	1.5
	25	12	0.5	13	13	8	120	D	20	20	F	96X70X143	1.5
1 1/4"	35	22	0.5	8	8	8	80	D	20	20	F	131X96X158	2.8
	35	22	0.5	8	8		120	D	20	20	F	131X96X158	2.8
	35	22	0.5	8	8	8	120	D	20	20	F	131X96X158	2.8
1 1/2"	40	30	0.5	8	8	8	80	D	20	20	F	131X96X158	2.7
	40	30	0.5	8	8		120	D	20	20	F	131X96X158	2.7
	40	30	0.5	8	8	8	120	D	20	20	F	131X96X158	2.7
2"	50	48	0.5	8	8	8	80	D	20	20	F	165X120X179	4.6
	50	48	0.5	8	8		120	D	20	20	F	165X120X179	4.6
	50	48	0.5	8	8	8	120	D	20	20	F	165X120X179	4.6

# Coreline

**CORELINE LTD.**

Add: No.4 Wangjiang Road, Muqiao Town, Zhengpugang New District, 238200 Hexian, Ma'anshan City, Anhui Province, China

The contents of this catalogue are confidential and proprietary to Coreline, we reserve the right to change the specifications without any notice.

Http: // www.coreline.dk

E-mail : mail@coreline.cn