



Fig.822 Y-strainer

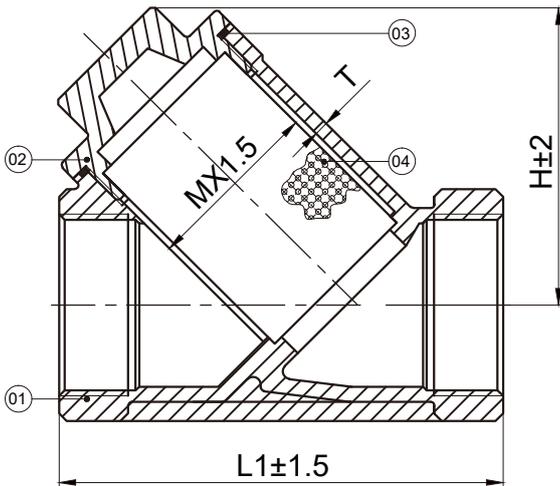

Valve type	Fig.822 Y-strainer
Nominal size	1/4"~4"
Connection standard	BSPP
Pressure	800psi
Shell test (water)	8.3MPa
Manufacture	ASME B 16.34
Pressure/temperature	ASME B 16.34
Test and inspection	API 598

No.	Parts Name	Material
1	Body	CF8M
2	End Cap	CF8M
3	Gasket	PTFE
4	Filter Net	316

SIZE	L1	H	T	M	L2	D	Cv	W.T(Kg)
1/4"	64.5	44	2.3	24	33.5	19	3	0.254
3/8"	64.5	44	2.3	24	33.5	19	3	0.232
1/2"	59	41.5	2.3	24	33.5	19	3.5	0.170
3/4"	73.5	50.5	2.3	30	38	24	4	0.307
1"	84	59	2.3	36	51.1	31	4.7	0.402
1 1/4"	99	65	3.0	42	53	35	8.3	0.593
1 1/2"	108	75	3.0	48	60.5	43	11.7	0.843
2"	125.5	89	3.5	59	76	53	18.7	1.252
2 1/2"	167	125	4	74.5	92	68	31.6	2.792
3"	191	140	4.5	89	104	81	48	4.212
4"	239	180	4.5	111	141	103	74.9	6.930

Coreline

CORELINE LTD.

Add: No.4 Wangjiang Road, Muqiao Town, Zhengpugang New District, 238200 Hexian, Ma'anshan City, Anhui Province, China

The contents of this catalogue are confidential and proprietary to Coreline, we reserve the right to change the specifications without any notice.

Http: // www.coreline.dk

E-mail : mail@coreline.cn