
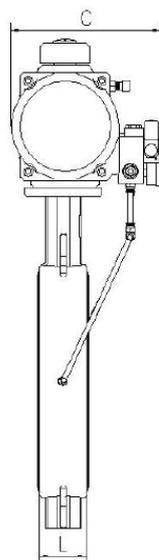


Dimensions for Inflatable Butterfly Valve

Features

- Pneumatically inflatable elastomeric seat.
- Depressurised seat during opening and modulation.
- Radial seal expansion at closed position.
- Uniform circumferential sealing pressure.
- Reduced wear in abrasive service.


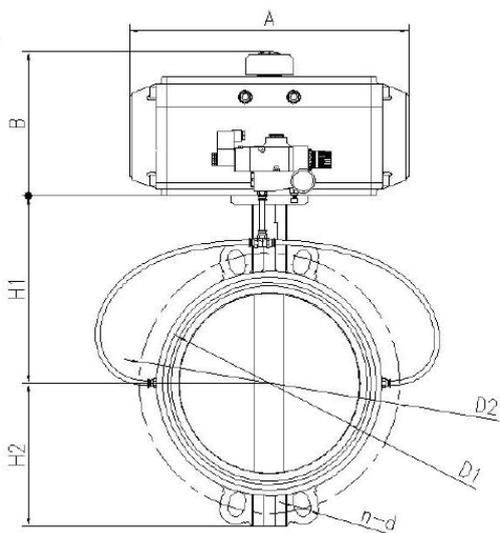


DN	L	D1	D2	H1	H2	n	d	A	B	C	ISO5211	
DN50	42	52.6	125	142	80	4	16	163	96	116	F05	11
DN65	44	64.4	145	155	89	4	16	195	115	131	F05	11
DN80	44	78.9	160	161	95	8	16	195	115	131	F05	11
DN100	50	104.1	180	180	114	8	16	217	137	151	F07	14
DN125	56	123.4	210	193	127	8	16	258	147	162	F07	14
DN150	56	155.9	240	205	139	8	20	299	165	176	F07	14
DN200	60	202.8	295	250	175	8	20	349	182	176	F07	17
DN250	68	250.8	350	282	203	12	20	397	199	213	F10	22
DN300	78	301.9	400	326	242	12	20	473	221	232	F10	22
DN350	78	334	460	358	267	16	20	560	249	253	F14	27
DN400	102	390	515	380	301	16	24	601	280	283	F14	27
DN450	114	441	565	422	381	20	24	738	383	393	F16	32
DN500	127	492	620	479	387	20	24	738	383	396	F16	32
DN600	151	593	725	562	457	20	27	940	434	455	F25	36

Air set for Inflatable Butterfly Valve

Features

- Compact design & easy installation.
- Adjustable time delay.
- Less wear & longer life time.

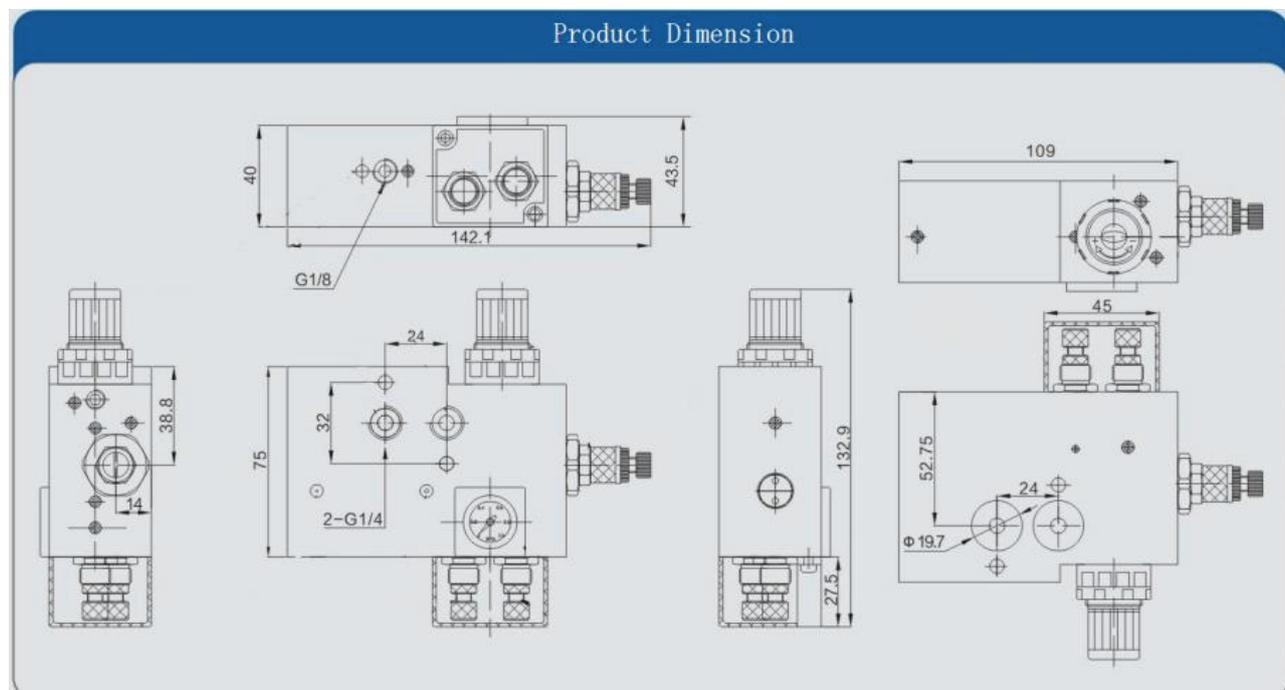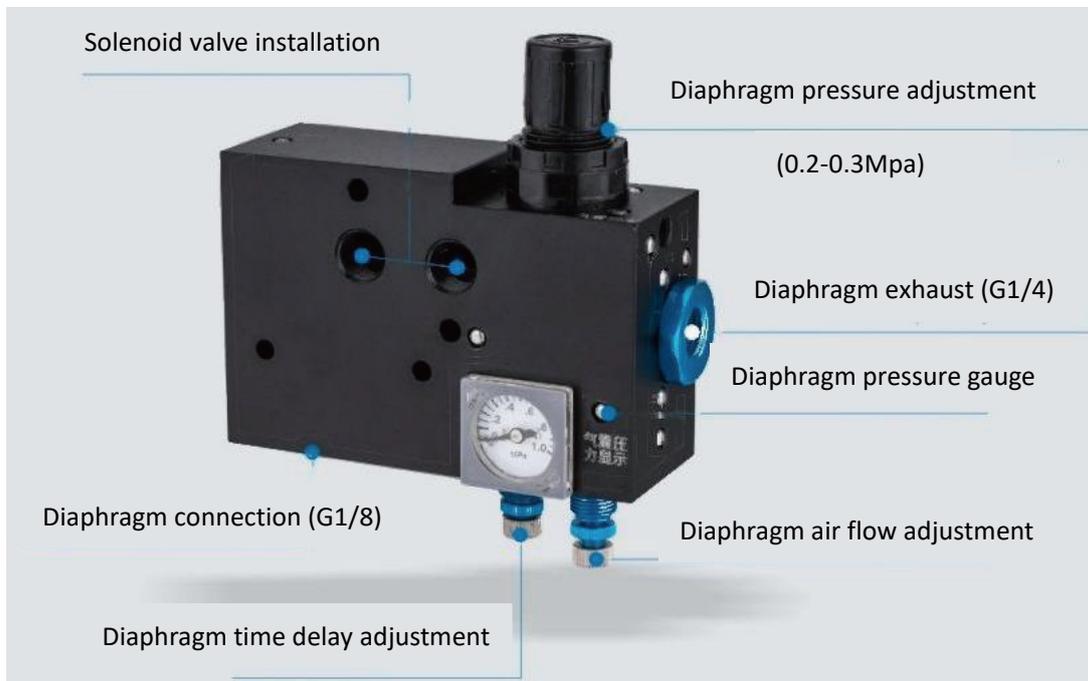

Coreline

The contents of this catalogue are confidential and proprietary to Coreline, we reserve the right to change the specifications without any notice.

CORELINE LTD.

Add: No.4 Wangjiang Road, Muqiao Town, Zhengpugang New District, 238200 Hexian, Ma'anshan City, Anhui Province, China

Http: // www.coreline.dk

E-mail: mail@coreline.cn