


Fig.120D union ball valve - Degreased for Oxygen


Size: 1/2", 1"
 Pressure rating: PN63

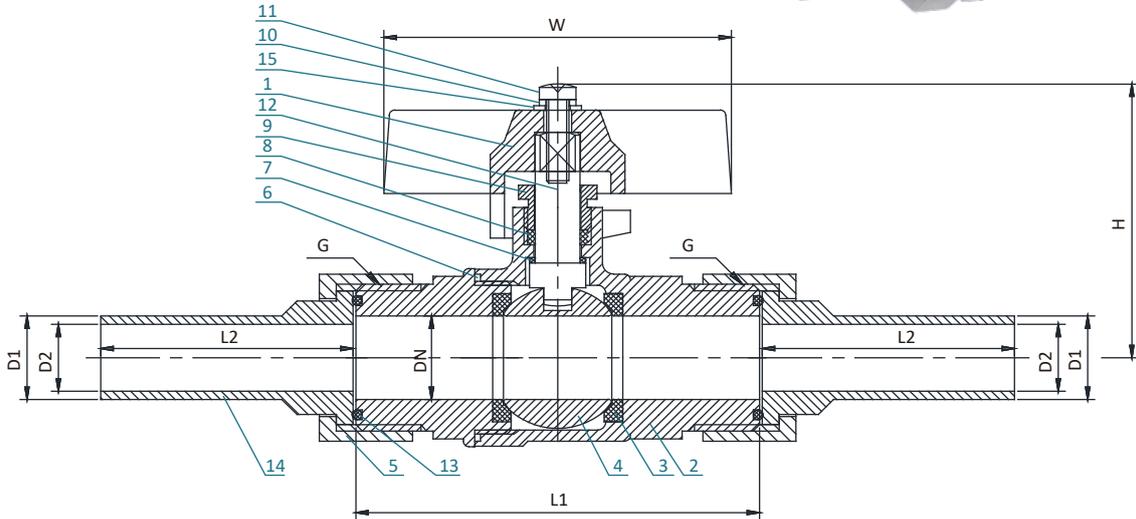

NO.	NAME	MATERIAL	QTY	NO.	NAME	MATERIAL	QTY
1	HANDLE	CF8M	1	9	GLAND NUT	304	1
2	BODY	CF8M	1	10	SPRING WASHER	304	1
3	BALL SEAT	PTFE	2	11	BOLT	304	1
4	BALL	316	1	12	STEM	316	1
5	NUT	CF8M	2	13	O-RING	VITON	2
6	END SEAL	PTFE	1	14	CONNECTING JOINT	316L	2
7	THRUST WASHER	PTFE	1	15	WASHER	304	1
8	STEM PACKING	PTFE	1				

INCH	DN	D1	D2	L1	L2	H	W	G
1/2"	15	15	12	72	45	49.2	62	G3/4"
1"	25	28	25	100	60	61.5	62	G 1 1/4"

Pressure temperature curve - PTFE

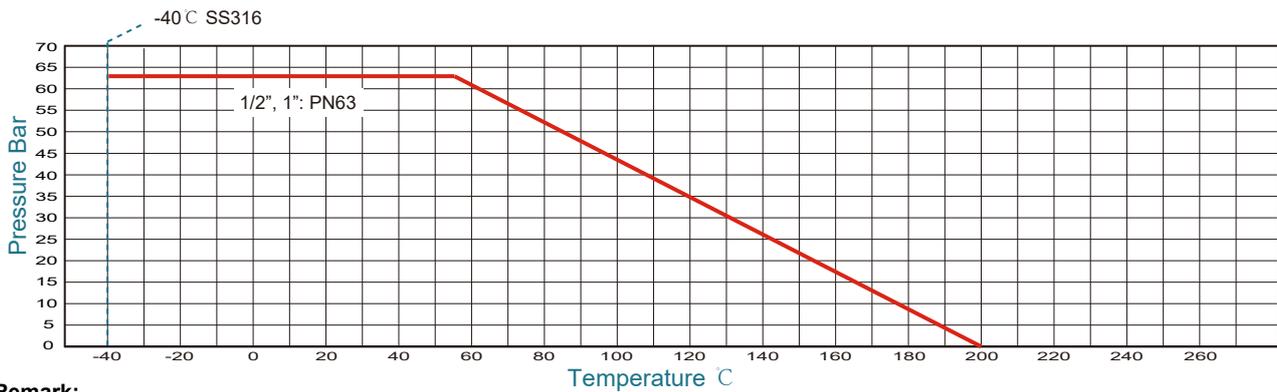

Remark:
 The pressure-temperature curve above represents the theoretical performance of PTFE. However, actual pipeline conditions may impact the valve's overall performance. Please evaluate and consider the specific application conditions comprehensively.



CORELINE LTD.

Add: No.4 Wangjiang Road, Muqiao Town, Zhengpugang New District, 238200 Hexian, Ma'anshan City, Anhui Province, China

The contents of this catalogue are confidential and proprietary to Coreline, we reserve the right to change the specifications without any notice.

Http: // www.coreline.dk

E-mail : mail@coreline.cn